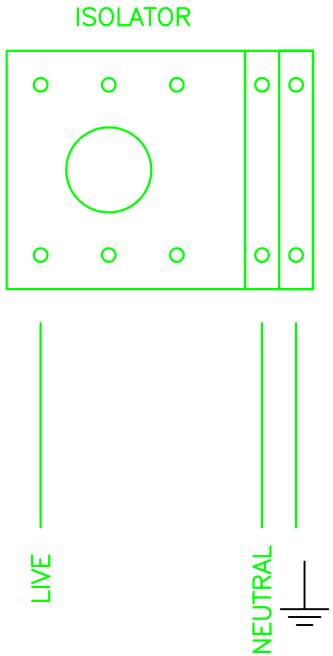

SUPPLY 230VAC 50Hz
5A MOTOR RATED

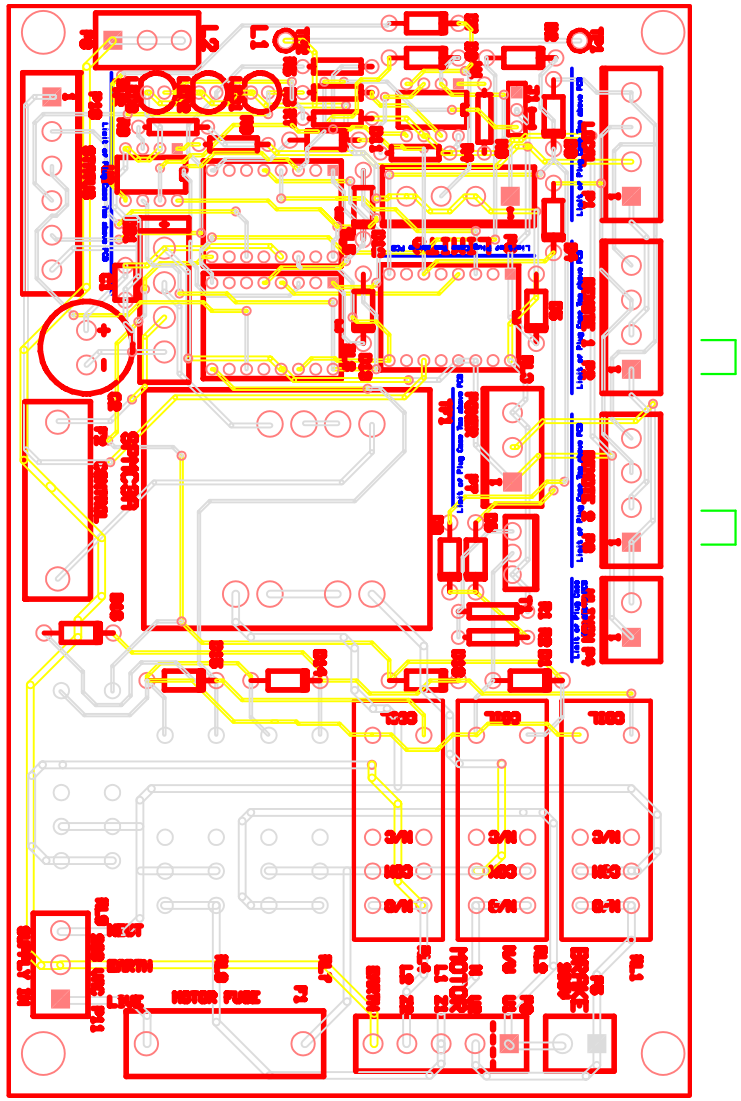

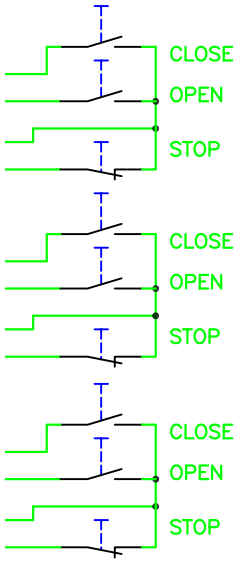

REMOVE LINKS WHEN REMOTES FITTED

REMOTES ARE 24V DC AT 50mA.

Harness Hall Ltd.
The Gate Studios
Station Road
Borehamwood
Hertfordshire WD6 1DQ
United Kingdom
TEL: 0208 953 3011
FAX: 0208 207 3857
E-Mail: info@harnesshall.com

UNLESS OTHERWISE STATED DIMENSIONS IN MM REMOVE SHARP EDGES
GENERAL TOLERANCE
ANGULAR TOL. ± 0.25° 1 DEC. PLACE ±0.4mm
DRILLED HOLES. ± 0.1mm 2 DEC. PLACES ±0.1mm

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE PRIOR APPROVAL OF HARNESS HALL LTD

			DRN PJW	TITLE Circuit Diagram SPMC3A MOTOR CONTROL BALANCED WIRING DETAILS
			DATE 22:04:04	
			CHD	
	A	MAT'L:NTS	A3 SCALE NTS	
MOD	ISSUE	SPEC:	APPD	DRG NO 397008A ISSUE: A