


10 METERS MAXIMUM LENGTH

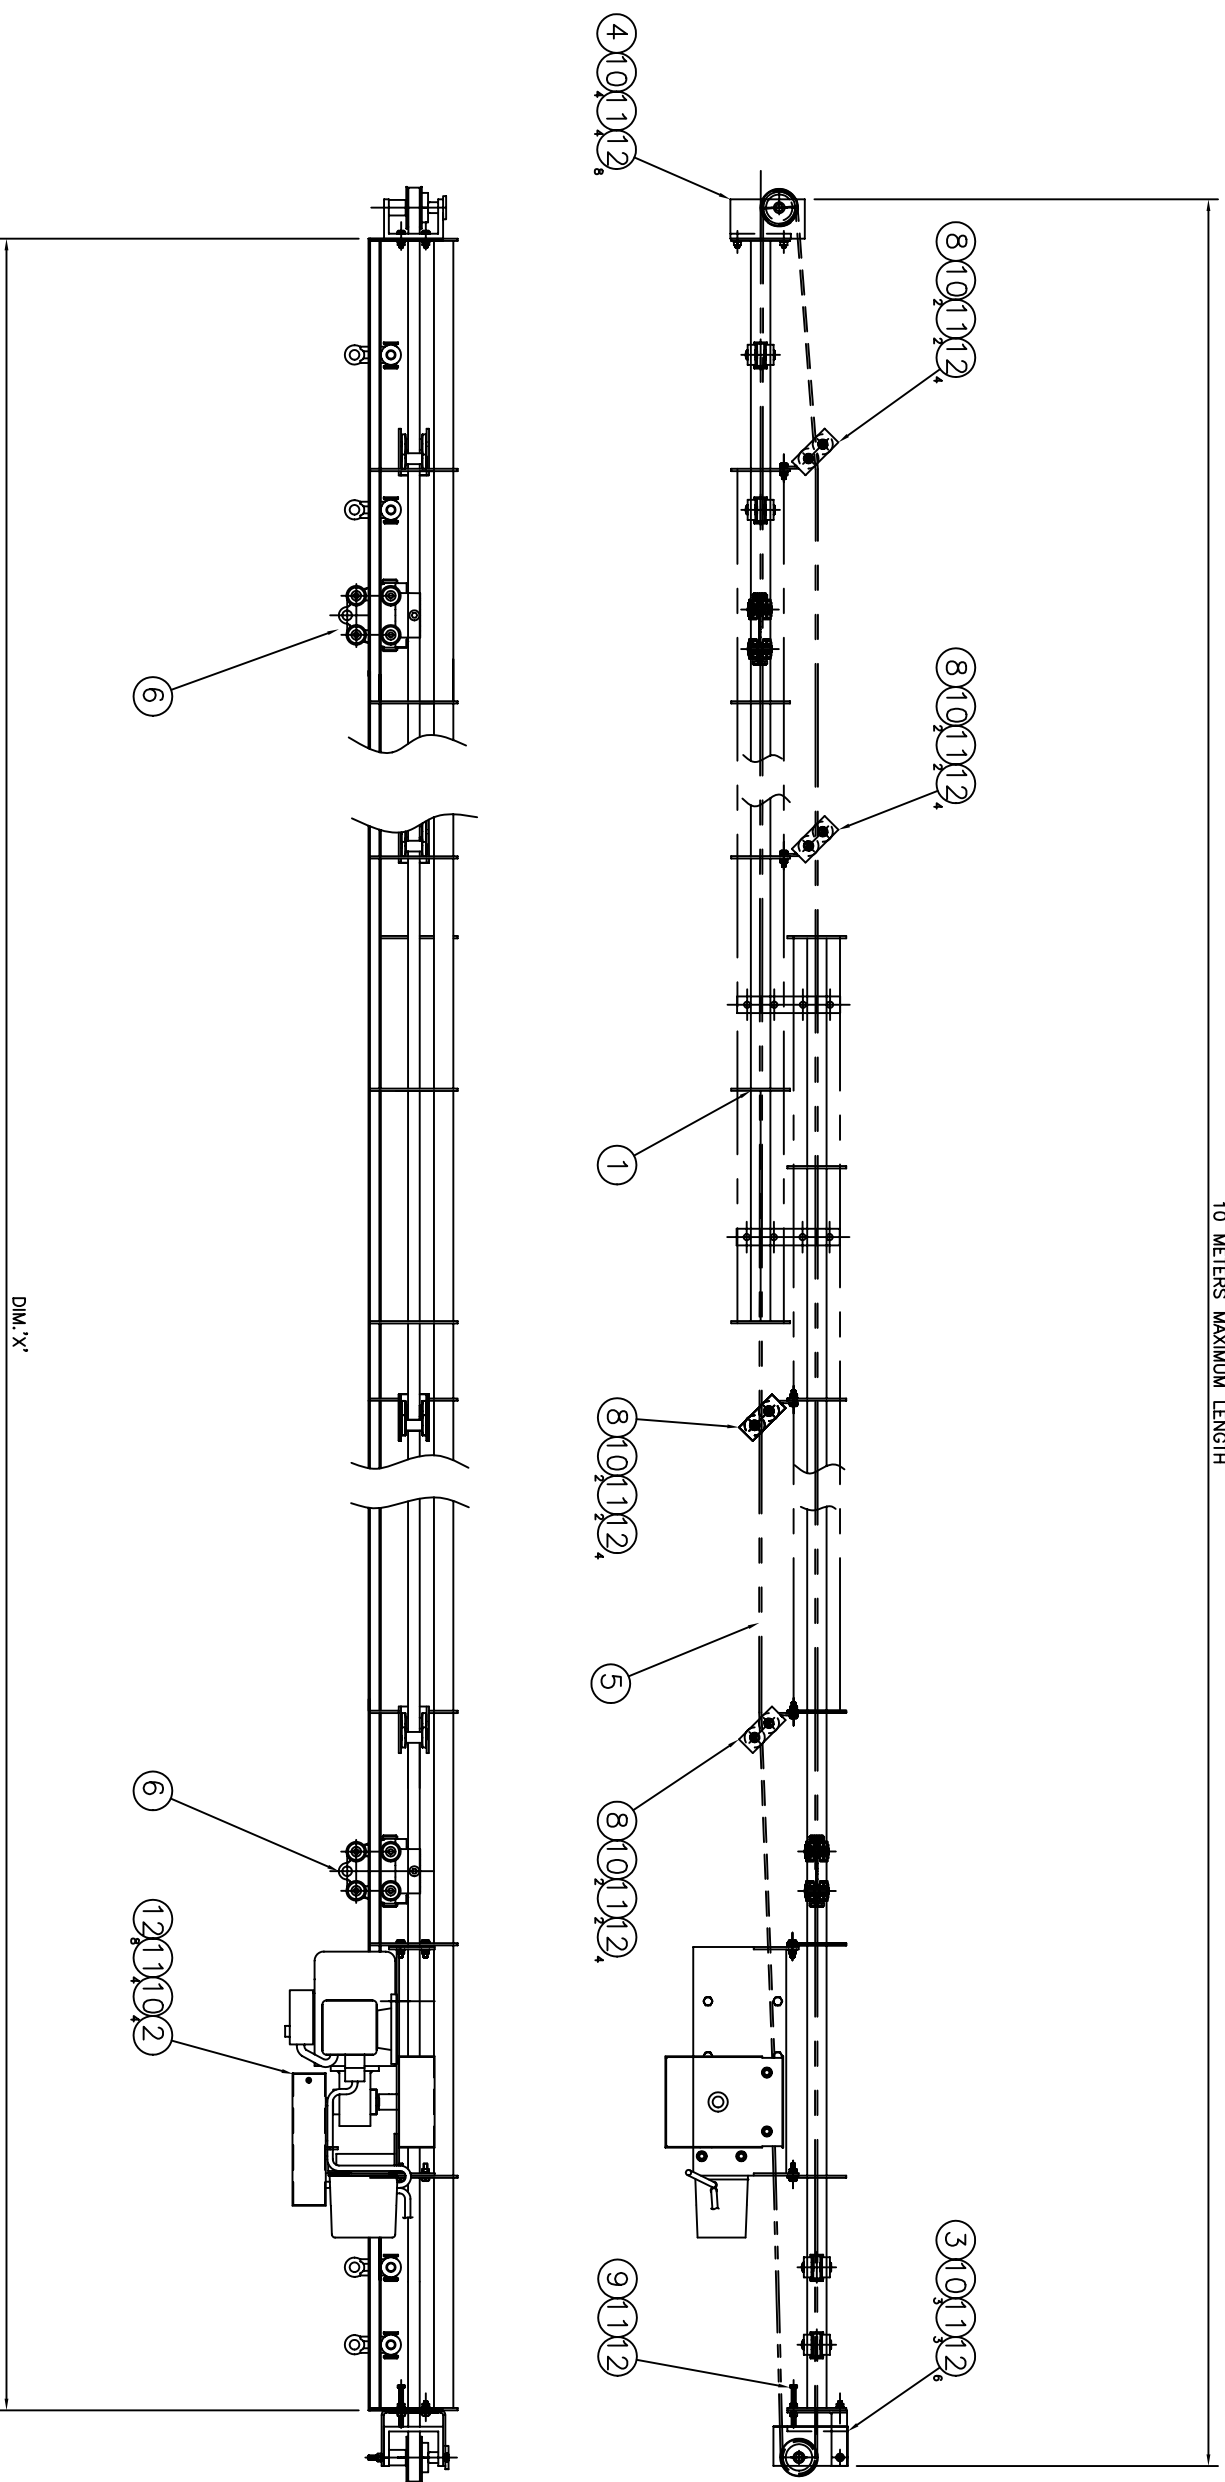

THIS MOTOR DRIVE IS MOUNTED TO STANDARD 160 NON POWERED TRACK

NOTES:

1. FOR DIMENSION 'X' REFER TO FITTERS DOCKET
2. ON FINAL ASSEMBLY TIGHTEN DRIVE BELT (ITEM 5) BY ADJUSTING T60 BELT TENSIONER (ITEM 3)
3. REMOTE MOTOR CONTROLLER (ITEM 7) POSITION TO BE DETERMINED AT INSTALLATION.
4. ASSEMBLY TO BE MOUNTED IN POSITION USING T60 STANDARD TRACK SUPPORTS, TYPE & POSITIONS TO BE DETERMINED IN ACCORDANCE WITH BUILDING/SUPPORT CONDITIONS.
5. FOR THE BASIC T60 TRACK REQUIREMENTS SEE FITTERS DOCKET.
6. THE NUMBER OF PULLEY BELT GUIDE ASSEMBLIES (ITEM 8) TO BE DETERMINED IN ACCORDANCE WITH TRACK LENGTH.
7. BELT LENGTH = 2 x TRACK LENGTH + 480mm

MOD	ISSUE	SPEC:	SEE P/Labels	DR D.P	TITLE ASSEMBLY
A	MAT'L	SEE P/Labels	AT SCALE	DATE	T60 TRACK WITH SIDE MOUNTING
				10/11/08	MOTOR DRIVE
				CHD	
				APPD	DRG NO 6685
					ISSUE 1